



PCT / IB 115 / 04387

03.10.03



INVESTOR IN PEOPLE

REC'D 16 OCT 2003

WIPO

PCT

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 24 September 2003

**BEST AVAILABLE COPY****PRIORITY  
DOCUMENT**SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

An Executive Agency of the Department of Trade and Industry

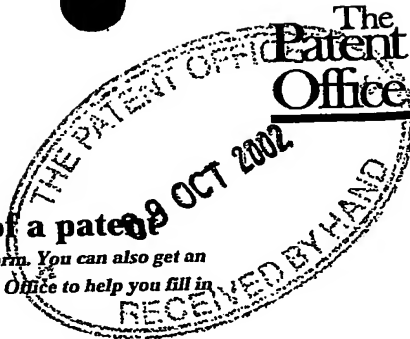

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference 301894GB/JPR/erw

2. Patent application number  
(The Patent Office will fill in this part)

09 OCT 2002

0223498.7

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA CORPORATION  
KEILALAHDENTIE 4  
FIN-02150 ESPOO  
FINLAND

Patents ADP number (If you know it) 07652217001

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

4. Title of the invention

Provision of Information Regarding A Mobile Station

5. Name of your agent (If you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (Including the postcode)

Page White & Farrer  
54 Doughty Street  
London  
WD1N 2LS  
United Kingdom

Patents ADP number (If you know it)

00001255003

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (If you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 25

Claim(s) 3

Abstract 1

Drawing(s) 13 + 13 *pk*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

*(Page White & Farrer)*  
PAGE WHITE & FARRER

Date

9 October 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Juha-Pekka Ruuskanen  
020 7831 7929

## Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## Provision of information regarding a mobile station

### Field of the Invention

5 The present invention relates to provision of information regarding a mobile station adapted for wireless communication services via a communication system, and in particular, to signalling of information that is generated based on the geographical location of the mobile station in response to a  
10 predetermined event such as entering or leaving a geographical area.

### Background of the Invention

15 Communication systems providing users thereof with a possibility for wireless communication are known. A typical example of such systems is a cellular or mobile communications system. The cellular communication system is a communication system that is based on use of radio access entities and/or  
20 wireless service areas. The access entities are often referred to as cells. A characteristic feature of the cellular systems is that they provide mobility for the users of the communication system. Hence they are often referred to as mobile communication systems.

25

Non-limiting examples of cellular communications systems include standards such as the GSM (Global System for Mobile communications) or various GSM based systems (such as GPRS: General Packet Radio Service), AMPS (American Mobile Phone System), DAMPS (Digital AMPS), WCDMA (Wideband Code Division Multiple Access), TDMA/CDMA (Time Division Multiple Access / Code Division Multiple Access) in UMTS (Universal Mobile Telecommunications System), IMT 2000, i-Phone and so on.

In a cellular system, a base transceiver station (BTS) provides a wireless communication facility that serves mobile stations (MS) or similar wireless user equipment (UE) via an air or radio interface within the coverage area of the cell. As the approximate size and the shape of the cell is known, it is possible to associate the cell to a geographical area. The size and shape of the cells may vary from cell to cell. Several cells may also be grouped together to form a larger service area. A base station may provide more than one cell.

Each of the cells can be controlled by an appropriate controller apparatus. For example, in the WCDMA radio access network the base station (which may be referred to as Node B) is connected to and controlled by the radio network controller (RNC). In the GSM radio network the base station may be connected to and controlled by a base station controller (BSC) of a base station subsystem (BSS). The BSC/RNC may be then connected to and controlled by a mobile switching center (MSC). Other controller nodes may also be provided, such as a serving GPRS support node (SGSN). The MSCs of a cellular network are typically interconnected and there may be one or more gateway nodes connecting the cellular network e.g. to a public switched telephone network (PSTN) and other telecommunication networks such as to the Internet and/or other packet switched networks.

The cellular network apparatus and/or the mobile station can be employed for provision of location information of the mobile station and thus the user thereof. In an application the cells or similar geographically limited service areas and associated controller nodes facilitate the cellular communications system to produce at least a rough location

information estimate concerning the current geographical location of a particular mobile station. If the location of the cell is known, it is possible to conclude therefrom the geographical area in which a given mobile station  
5 communicating in said cell is likely to be at a given moment. This information may be provided also when the mobile station is located within the coverage area of a visited or "foreign" network. The visited network may be capable of transmitting location information of the mobile station back to the home  
10 network, e.g. to support location services or for the purposes of call routing and charging.

A mobile station itself may also be provided with appropriate equipment to provide information on which the positioning of  
15 the mobile station can be based on. The mobile station may communicate the information via the base to an appropriate network element that may use the information in a predefined manner.

20 More accurate location information may be obtained based on various location estimation methods, e.g. based range difference (RD) measurements or by means of an external location information service, for example a satellite based system such as those referenced by the names 'Global  
25 Positioning System' (GPS) or 'Galileo'. The measurements may be accomplished at the mobile station or by a number base stations.

The location information is typically provided by means of a  
30 location service functionality associated with the communication system. The location service functionality may be provided by a separate network element such as a location server which receives location information from one or more

sources. If the service entity receives only an indication of the present cell (e.g. the cell ID), and no further computations and/or approximations are made, this would give the location to an accuracy of one cell, i.e. it would indicate that the mobile station is (or at least was) within the coverage area of a certain cell.

3GPP specification 3GTS 23.032 v4.0.0 titled 'Universal Geographical Area Description' presents a possibility for defining/representing geographical areas. The definition is based on shape and one or several location points. This concept may be referred to as DEfined Geographical Areas (DEGA). Based on this concept the mobile station measures its position. The station is adapted to compare the determined position to a defined geographical area. If it is determined that the mobile station has entered or left the defined area, the mobile station sends a notification thereof to the network.

Information that is required for the area definition is stored at the mobile station. The DEGA information may be broadcast via the base stations to the mobile stations. The DEGA information may also be stored beforehand in a SIM/USIM (subscriber identity module/UMTS SIM) of the mobile station. The DEGA information typically consists of one or several geographical points and shapes as defined by the 3GTS 23.032 specification. The DEGA information may also include a unique name, identification number or other identifier for the defined area in question.

A location-based application may be interested in when a specific subscriber is entering or leaving a geographical area. Different kinds of services are possible if such a

mechanism would be in place. It might be useful for various commercial and non-commercial services and similar applications to have information if a mobile station is located within a particular defined geographical area. In some application it might be useful for the network element to be able to accomplish the operation for obtaining location information only if the mobile station is detected as being in a selected part of the communication system. For example, various organisations or even individuals may want to send information and/or offer services to a mobile station only in a particular defined geographic area and/or to a certain type of subscriber in a particular geographical area. More detailed examples of these include location based push services like advertisements and parents monitoring the whereabouts of their children. It may be enough if the party requesting for information receives confirmation whether a mobile station is within the defined area or not. It would also be advantageous if the location information could be provided without causing excessive load into the resources of the communication network.

The inventors are not aware of any solutions to the above that could be implemented based on the existing standards and in which there is not a need for proprietary solutions utilizing some kind of polling schemes and/or heuristics have been proposed. All proposed solutions are based on polling mechanisms and/or they are introducing requirements for new architectural aspects to the communication standards. The earlier proposals utilize polling mechanisms and heuristics to decrease the polling intervals, as the subscriber is getting closer to the area of interest. Recently a user equipment (UE) based solution has been proposed in the 3GPP. However, this solution requires modification and/or introduction of the



application running in the Subscriber Identity Module (SIM) of the mobile station and communication utilizing the SMS service. The proposal also requires introduction of new architecture in the LCS. The inventors have also found that  
5 the prior art solutions based on polling and heuristics may be too heavy (both computationally and from the point of view of the load caused to the signalling channels), especially in occasions where nothing else than information whether a specific mobile station is located or not within a specific  
10 area is required.

#### Summary of the Invention

It is an aim of the embodiments of the present invention to  
15 address one or several of the shortcomings of the prior art solutions.

According to one aspect of the present invention, there is provided a method of providing information regarding a mobile  
20 station adapted for communication via a communication system, comprising:

receiving an area event notification request at a location service entity provided in association with the communication system, the area event notification request containing  
25 information associated with the identity of the mobile station and an area of interest;

activating monitoring for an event indicative of a change in the presence status of the mobile station relative to said area of interest; and

30 signalling a notification in response to detection of such event.

According to one aspect of the present invention, there is provided an arrangement in a communication system, comprising:

mobile stations adapted for wireless communication with base stations of the communication system;

5 a location service entity adapted for receiving an area event notification request containing information associated with the identity of a target mobile station and an area of interest;

10 monitoring means for monitoring, in response to receiving said request, for an event indicative of a change in the presence status of the target mobile station relative to said area of interest and for signalling a notification in response to detection of such event.

15 According to one aspect of the present invention, there is provided an area event notification request for use in a communication system wherein mobile stations adapted for wireless communication with base stations of the communication system, the request being for activating monitoring for an  
20 event indicative of a change in the presence status of a target mobile station relative to an area of interest and containing information associated with the identity of the target mobile station and the area of interest.

25 In a more specific form, the monitoring is activated at the mobile station.

The monitoring may be based on the identity of at least one cell of the communication system selected based on said  
30 information of the area of interest, on at least one location area determined based on said information of the area of interest, on at least one routing area determined based on said information of the area of interest, and/or on at least

one service area determined based on said information of the area of interest.

5 The area of interest may be defined by means of a shape of the area.

The request may contain further information regarding the event to reported, the further information defining whether entering or leaving of the area of interest shall be reported.

10

The request for area event notifications may be cancelled.

15 The embodiments of the invention may provide a system and method by means of which it is possible to provide information regarding the presence status of a mobile station relative a geographical area of interest.

#### Brief Description of Drawings

20 For better understanding of the present invention, reference will now be made by way of example to the accompanying drawings in which:

25 Figure 1 shows some of the elements of a cellular communication system in which the embodiments of the present invention may be implemented;

Figure 2 shows a defined area covered by cells;

Figure 3 is a flowchart illustrating the operation in accordance with an embodiment;

30 Figure 4 is a signalling chart illustrating the operation in accordance with an embodiment of the present invention;

Figures 5 to 12 relate to possible messages transmitted in various steps of Figure 4;

Figures 13 and 14 are signalling charts illustrating the operation in accordance with embodiments that are alternatives to that of Figure 4; and

Figure 15 is a signalling chart illustrating cancellation  
5 of an activated monitoring procedure.

#### Description of Preferred Embodiments of the Invention

Reference is made first to Figures 1 and 2. Figure 1 shows a  
10 part of a cellular public land mobile network (PLMN) 10 in which the embodiments of the present invention may be employed. Figure 2 shows schematically an area covered by a plurality of access entities 20 to 23, i.e. cells of the cellular communication system of Figure 1.

15

Each cell has associated therewith a base station 6. The 3<sup>rd</sup> generation telecommunications systems the base station may be referred to as node B. The term base station will be used in this document to encompass all elements which transmit to  
20 and/or receive signals from mobile stations 1 or the like via the air interface. Likewise, the wireless station or mobile stations are able to transmit signals to and receive signals from the respective base station via wireless communication with the base stations.

25

As shown by Figure 2, a base station may provide differently shaped radio coverage, such as an omnidirectional coverage area or a sector beam provided with a directional or sector antenna. The sector base station may use e.g. three 120°  
30 directional antennae whereby three radio coverage areas are provided, or four 90° directional antennas providing four radio coverage areas and so on, or any combinations of different radio coverage beam widths. It should be appreciated

that the size and shape of the cells or other access entities is typically not as regular as what is shown in Figure 2, but will depend on the conditions in the area and the communication application.

5

The mobile stations are able to move within the cell and also from one cell coverage area to another cell coverage area. The location of a mobile station may thus vary in time as the mobile station is free to move within the service area of the communication system.

10

The user equipment, such as the mobile station 1 may be provided with an appropriate terminal equipment 11 for the provision of location information, such as a processor unit.

15

Some of the elements of a PLMN network system will now be discussed in more detail before explaining the basic concept of the present invention. The mobile stations or user equipment 1 is arranged to communicate via the air interface with a respective base station 6. Each base station is controlled by respective controller. In Figure 1 this is provided by means of a base station controller (BSC) 7. The third generation (3G) systems refer to a radio network controller RNC for similar functionality. The controller 7 and the base station 6 may sometimes be referred to by term such as the radio network subsystem RNS or UMTS terrestrial radio access network UTRAN 10. The radio network subsystem 10 may be connected to a controller node such as a MSC (mobile switching centre) or a SGSN (serving GPRS support node) 14. The MSC 14 provides various control functions such as keeps track of the mobile station's location for the purposes of call routing and performs security functions and access control. Each subscriber is typically registered in a register functionality

20  
25  
30

such as a Home Location Register (HLR) 9 or Home Subscriber Server (HSS). The MSC or similar may communicate with the register entity via a suitable interface arrangement. In some application the MSC and the HLR are an integrated entity. The  
5 MSC 14 may be connected to further nodes such as a gateway (not shown for clarity). The entities of a PLMN are well known by the skilled person, and are thus not explained in any greater detail.

10 The PLMN system may be connected to various other communication networks, such as to another PLMN, to a public switched telephone network (PSTN) or to a data network such as the Internet. This is designated by the operator B in Figure 1. The various networks may be interconnected to each  
15 other via appropriate interfaces and/or gateways. These are known, and do not form an essential part of the invention, and are therefore not shown for clarity.

The geographical location of the base stations is known. The  
20 location of the base station may be defined, for example, in X and Y co-ordinates or in latitudes and longitudes. It is also possible to define the location of the mobile station in vertical directions. For example, Z co-ordinate may be used when providing the location information.

25

Figure 1 also shows a location services (LCS) node 12 providing location services for different applications or clients 8. In general terms, the LCS node can be defined as a function or entity capable of providing information concerning  
30 the geographical location of a mobile station. In Figure 1 the node 12 is shown to comprise a gateway mobile location center (GMLC) provided in the core network side of the communications system 10. It shall be appreciated that other elements than

the shown GMLC entity may provide the active LCS element. It shall also be appreciated that a communication system may comprise more than one location service element (e.g. a number of location server). Each of the location service elements may have an individual address or other identifier so that the other elements of the system may communicate thereto. It should be appreciated that the elements of the location service functionality may be implemented anywhere in the telecommunications system and that the actual location service implementation may be distributed between several elements of the system. In addition, more than one location service may associate with a telecommunication system, e.g. when two competing service providers have location service apparatus of their own. A more detailed description of a possible location server can be found, for example, from ETSI (European telecommunications Standards Institute) technical specification "Location Services" 3GPP specifications 3GTS23.171 or 23.271. These documents are incorporated herein by reference.

The location service node 12 of Figure 1 is arranged to receive predefined information concerning the location of the mobile stations from the radio access network via MSC and/or SGSN 14. The location server 12 may be arranged to process information received from the network side and/or some other predefined parameters and/or to compute by processor means appropriate calculations for determining and outputting information based on the geographical location of the mobile stations.

The location server node 12 may provide location information to a client 8. The client 8 is a logical functional entity that makes a request to the GMLC node 12 for information that

concerns one or more of the mobile stations of the cellular system. The LCS client 8 may be an entity that is external to the PLMN. The client may also be an internal client (ILCS) i.e. reside in any entity (including a mobile station) within the PLMN. The client is entitled to receive at least some degree of information concerning the location (or location history) of the mobile station 1.

The location server node 12 responds to a location request from a properly authorised location client 8 with information concerning mobile stations if authentication and other requirements are satisfied. The location Server 12 may thus provide the client 8, on request, the current or most recent geographic location (if available) of the mobile stations within the defined area or, if the location procedure fails, an error indication and optionally the reason for the failure.

The particular requirements and characteristics of a location client 8 are preferably known to the server 12 by its location client subscription profile. The particular client related restrictions may also be detailed in the subscription profile of the client. The location Server 12 may also enable a network operator to charge the client 8 for the location features that the network operator provides.

25

The location server node 12 may consists of a number of location service components and bearers needed to serve the location clients 8. The location server node 12 may provide a platform which will enable the support of location based services in parallel with other telecommunication services such as speech, data, messaging, other teleservices, user applications and supplementary services.



Figure 1 shows also a privacy profile register (PPR) 13 for storing privacy information of the target mobile user equipment. The PPR may also be used for functions such as executing privacy checks and sending of the privacy check results to other network elements, e.g. on the Lpp interface. PPR may be formed by means of a standalone network entity or the PPR functionality may be integrated in the home-GMLC of the target mobile station.

The embodiments of the present invention aim to provide a solution wherein the presence status of a subscriber within an area of interest 5 can be monitored. Figure 2 shows for clarity reasons that the area of interest 5 has a rectangular shape. However, it shall be appreciated that the area of interest may have any appropriate shape such as ellipsoidal, polygonal or circular shape. The area may also be defined e.g. as an area within a defined radius or distance from a certain point (e.g. base station location or any other location), name of an area (e.g. name of a town, village or an organisation within a predefined area), by co-ordinates or latitudes and longitudes and so on. The area definition may also comprise an altitude parameter.

The following will describe in more detail a possibility to employ the already existing mechanisms so that an area related event trigger can be provided within the existing architectural framework, such as in the framework specified in 3GPP LCS specifications without adding any significant signalling load to the network.

30

Turning now also to Figure 3, the client 8, such as location-based service sends a location request towards the mobile network 10. The request indicates a geographical area of

interest and the target subscriber. The definition of the geographical area may be based on as one or several geographical points and shapes, e.g. in the manner as defined by the referenced 3GTS23.032 specification. The request may  
5 also include an indication whether the client application is interested in when the subscriber is leaving or entering the area.

The geographical area 5 may be translated into a list of Cell  
10 Ids. In Figure 2 the area 5 is shown to be covered by the cells 20 to 23. The IDs of these cells would thus be included in the list.

It shall be appreciated that other possibilities for the area  
15 definition may be used as well. For example, the area may be defined based on Cell Group Identities (CGI), Service Area identities (SAI), Location Areas Codes (LAC), Routing Area (RAC) and so on.

20 According to a possibility the GMLC 12 or another appropriate entity capable of providing a mapping function maps the defined area to cells belonging to the defined area. The mapping can be made, for example, by using existing lists of base station co-ordinates and their estimated ranges or by any  
25 other appropriate criteria. It is possible to define that only such cells are mapped that are entirely within the defined area. It may also be defined that it is enough is a predefined portion of the cell coverage area is within the defined area.

30 The mapping may be accomplished in any appropriate entity. Figures 4, 13 and 14 show three alternatives for the possible mapping entity and associated signalling.

The list of cells may then be sent to the mobile station 1 to register the "area event trigger". When the Cell ID is updated as the subscriber is moving the mobile station 1 will check the new Cell ID against the list. If there is match, the mobile station 1 sends a report back to the network. In Figure 1 the message would be passed from the mobile station 1 to the GMLC 12.

The network then signals information to the client application 8 that the terminal has entered/left the area of interest. The response may simply inform that the mobile station is now within the area, or is outside the area.

Reference is now made to the signalling chart of Figure 4 that shows in greater detail an embodiment. The operation is based on the use of the current LCS architecture. More particularly, Figure 4 illustrates a procedure for a deferred location request where a location report is returned to the network by the mobile user equipment (UE) only following the occurrence of an area event. An area event occurs when the specified user equipment leaves or enters a predetermined geographical area. The area may be defined by means of any appropriate scheme, such as by means of one or more cells, a Routing Area (RA) or a Location Area or GAD shape.

In step 1 an LCS Client 8 sends provide subscriber location (PSL) request, and more particularly, a deferred location request message to the GMLC 12. The location request for triggered reporting contains the identity of the target user equipment, a shape conforming to TS 23.032 and an "area event" indication. The Deferred Location Request message may also contain more specific details about the event triggering the

reporting. Steps 2 to 4 may be accomplished e.g. according to 3GPP technical specification TS 23.271 for an ordinary MT-LR.

In step 5 the GMLC sends a modified MAP-PROVIDE-SUBSCRIBER-LOCATION message to the VMSC/SGSN. The message contains identity of the target subscriber such as the IMSI (International Mobile Subscriber Identity) of the target subscriber or the MSISDN, the shape and the area event trigger. An example of the possible structure of the message is shown in Figure 5.

To convert the geographical area specified by the shape the VMSC/SGSN may send a modified BSSMAP-LE Perform Location Request message to the BSC carrying the shape provided in the previous step, see step 6. The shape indication is shown as the lowest item the exemplifying message of Figure 6.

The location type information element may have the form as shown in Figure 7. The coding of the location information may be indicated as follows:

00000000	current geographic location
00000001	location assistance information for the target MS
00000010	deciphering keys for broadcast assistance data
25	for the target MS
00000100	List of CGIs, LACs within the boundaries of the
	shape provided in the request
	all other values are reserved

30 In step 7 the BSSMAP-LE message Perform Location Request sent by the VMSC/SGSN is forwarded by the BSC to the SMLC. The SMLC may then make the conversion of the shape into a list of CGIs and LACs and send a BSSMAP-LE Perform Location Response to the

BSC, see step 8. The content of a possible response message is shown in detail in Figure 8.

In step 9 the BSC receives the response from the SMLC and sends a response back to the MSC. The MSC may then send a new DTAP LCS-AreaEventInvoke message to the user equipment (UE) carrying the List of CGIs, SAIs, RACs or LACs and so on and the area event indication, see step 10. An exemplifying DTAP message is shown in detail Figure 9.

If the DTAP LCS-AreaEventInvoke message is successfully received by the user equipment it stores the list of CGIs, and other possible information to the memory thereof and activates the monitoring, step 11. If so indicated in the DTAP LCS-AreaEventInvoke message, some text may be displayed to the subscriber by means of the display of the user equipment. The user may then accept or reject the Deferred Location Request.

Optionally, the network may specify a time when the area event trigger is cancelled even if the event has not occurred.

The message may also include the GMLC address so that when the event occurs the response can be routed to the correct GMLC even if the user equipment has moved to an area served by another MSC.

In the response to the DTAP LCS-AreaEventInvoke message the user equipment may send at step 12 one of the following responses back to the VMSC/SGSN:

- a) The request has successfully been set-up and is waiting for a trigger event.
- b) Trigger already satisfied.

- c) Maximum number of allowed Deferred Location Requests reached.
- d) The request could not be set-up - User rejected request.
- e) The request could not be set-up - ME rejected request.

5

The MSC receives the DTAP LCS-AreaEventInvoke message at step 13 from the user equipment UE and includes the result in the response to the provide subscriber location (PSL) request. A possible response is shown in Figure 10.

10

If the Deferred Location Request was successfully registered with the UE this is returned at step 14 to the LCS Client, otherwise an error is returned.

- 15 When the UE performs a cell handover the monitoring entity (ME) shall check the details of the new serving cell, including the cell ID, step 15. If the user equipment comprises the monitoring entity, the area event monitoring functionality of the user equipment (UE) may compare the
- 20 current cell ID or similar against one or more, target cell Ids in the list received from the network.

When the event occurs, depending upon the LDR requirement, one of the two following responses may be generated:

25

- a) An area event LCS report indicating a positive match with the target cells, i.e. the subscriber is ENTERING the area; or
  - b) An area event LCS report indicating a negative match
- 30 with the target cells, i.e. the subscriber is LEAVEing the area.

A detected change in the cell ID or cell group ID, location area code (LAC) or Routing area code may trigger a more accurate positioning if so supported by the UE. The calculated position is compared to the shape sent in sep 10.

5

The area event monitoring application may then disable itself and a DTAP LCS-AreaEventReport is sent to the VMSC/SGSN; see step 16. The report may include the original LDR reference, the GMLC address, the time that the event occurred and the  
10 current serving cell ID. Information relating to the area event or UE status may optionally be included in this report. An exemplifying area event report is shown in Figure 11.

When the VMSC/SGSN receives the DTAP LCS-AreaEventReport it  
15 may generate a MAP-SUBSCRIBER-LOCATION-REPORT message and send it to the GMLC, as indicated in the DTAP message. A possibility for this report is shown in Figure 12.

In step 18 the GMLC acknowledges the receipt of the MAP-  
20 SUBSCRIBER-LOCATION-REPORT message. The privacy check of step 19 may be accomplished according to TS 23.271 for an ordinary MT-LR. The GMLC then sends the location report to the LCS Client indicating whether the subscriber has entered or left the area of interest, step 20.

25

Figures 13 and 14 correspond to the procedure of Figure 4, expect with regard to the element where the mapping takes place. In Figure 4 the mapping of the Cell IDs is performed in the servicing mobile location center (SMLC), see step 8.  
30 However, this may not be appropriate in all instances. For example, if a request sent to the SMLC is sent to a SMLC associated with the RNC/BSC where the UE is currently located, this SMLC might not necessarily have the information for the

cells of interest. This may be so since the SMLC may only have information of the area it is serving. The area supplied by the requesting application may be located in some other part of the network, and this may be hidden from the SMLC.

5

In Figure 13 the mapping is performed at the GMLC, see step 5. Use of the GMLC for the mapping avoid the above mentioned problem associated with the SMLC, and thus this is the preferred solution at the present. In this case the PSL needs

10 to be modified to carry the identity lists.

In Figure 14 the mapping is performed in the Visited mobile switching centre (VMSC)/SGSN, see step 6.

15 The operation of Figure 13 and 14 is otherwise analogous to that of Figure 4, and therefore the explanation thereof will not be repeated.

Figure 15 illustrates the procedures for cancelling a Deferred  
20 Location Request where the Location Report is returned to the network by the user equipment following the occurrence of an Area Event. In step 1 the LCS Client requests the cancellation of a previously requested Deferred Location Request. The cancellation may also be initiated by the GMLC itself for some  
25 reasons. For example, implementation dependent timer in the GMLC has expired, or the UE's privacy settings stored in the GMLC/PPR was changed and the Deferred Location Request is not allowed any more. The event type to cancel must be indicated in the Cancellation procedure. The cancellation may also be  
30 initiated by the user equipment. For example, implementation dependent timer in the UE expires, or a timer received from, the network expires.



In the next step the GMLC may make an SRIforLCS to the HLR of the subscriber to obtain the current VMSC as this might have changed since the Area Based trigger was registered with the UE. Steps 3 and 4 may be performed in accordance with the TS  
5 23.271 for an ordinary MT-LR. The GMLC may indicate the cancellation request in the Provide Subscriber Location message toward the VMSC/SGSN, see step 5.

The MSC may then send a DTAP LCS-AreaEventInvoke message at  
10 step 6 to the UE carrying the RequestID and an indication that the corresponding Deferred Location Request is cancelled. The UE de-activates the monitoring and purges the corresponding list of CGIs, LACs and Shape, see step 7. The user equipment may respond with and result indication that the Deferred  
15 Location Request was successfully cancelled, step 8. The VMSC may then send at step 9 an acknowledgement to the GMLC indicating that the Deferred Location Request was successfully cancelled. The GMLC may then purge any data related to the cancelled Deferred Location Request and send an  
20 acknowledgement at step 10 to the LCS Client, if the cancellation procedure was initiated by the LCS Client as indicated in step 1.

In accordance with an embodiment, upon receipt of the request,  
25 the mobile station 1 may check whether it is in the defined geographical area or not, and send as an immediate response the result (i.e. in / out).

The existing LCS architecture may be used for the provision of  
30 the event based location area reporting. The monitoring functionality required on the mobile station side may be implemented in the terminal itself. Alternatively the required functionality may be provided by means of an auxiliary device

associated with the mobile station. This could be an application running in the controller means of the mobile station or a server the mobile station may communicate with. It may be advantageous if the application does not run on the  
5 SIM (subscriber identity module) entity of the mobile station. This may enable solutions that are independent from the network operators.

The location procedure may be accomplished by the processor  
10 unit 11 of the mobile station.

If the UE supports some more accurate positioning technology the shape used in the request may be conveyed along with the Cells, Routing Area and Location Areas to the UE. In this case  
15 the Cells, Routing Area or Location Area trigger the actual positioning. The calculated position is compared to the submitted shape in the same ways as for plain Cells, Routing Area or Location Area.

20 Additionally, when the position of the UE is calculated for some other reason, the results may be compared against the submitted shape.

In addition to the cell ID based positioning, the location may  
25 be based on any appropriate technique, such as MO-LR (mobile station originated location request), mobile station based E-OTD (enhanced Observed time difference), GPS (Global Positioning System) or DGPS (differential GPS) and so on. The accurate location of the mobile stations may be estimated or  
30 calculated by using existing location methods.

In the preferred form a mechanism for registering an "area event trigger" is provided in the mobile user equipment 1.

However, the area related event triggering may also be provided in the network side. Thus, although the above described a solution wherein the request message is signalled to the radio access network and further to the mobile station, 5 the message may not be signalled to the mobile station, but the request is received and processed and the requested response information is generated by the elements of the network. The network based solution may be implemented e.g. such that the event is monitored and registered by the BSC.

10 In addition to the above referenced, the request message may contain various other information.

As shown by Figure 2, it is possible that the cells do not 15 provide a full coverage of the defined area 5. The completeness requirements for the coverage may be defined to fit the application, e.g. such that better coverage is required in tensely populated areas, e.g. in cities, than in rural areas. Of course, it may also happen that the cells are 20 overlapping. In such instance it may be enough if the user equipment leaves one of the cells, or enters one of the cells.

According to a preferred embodiment the mobile station 1 is provided with a location determination unit 11. It should be 25 appreciated that the mobile station may receive the location information from another source, such as from a SMLC that is implemented at the network side of the system.

It should also be appreciated that while in the above the 30 exemplifying embodiments of the invention have described in the context of a WCDMA (Wideband Code Division Multiple Access) UMTS (Universal Mobile Telecommunications System) and/or a GPRS (General Packet radio Service), the embodiments

of the present invention are also applicable to any other cellular communication system which deals with packet data, non-packet data, voice communication and so on.

5 It is also noted herein that while the above describes exemplifying embodiments of the invention, there are several variations and modifications which may be made to the disclosed solution without departing from the scope of the present invention as defined in the appended claims.

## Claims

1. A method of providing information regarding a mobile station adapted for communication via a communication system,  
5 comprising:  
    receiving an area event notification request at a location service entity provided in association with the communication system, the area event notification request containing information associated with the identity of the mobile station  
10 and an area of interest;  
    activating monitoring for an event indicative of a change in the presence status of the mobile station relative to said area of interest; and  
    signalling a notification in response to detection of such  
15 event.
2. A method as claimed in claim 1, wherein the monitoring is activated at the mobile station.
- 20 3. A method as claimed in claim 1, wherein the monitoring is based on the identity of at least one cell of the communication system selected based on said information of the area of interest.
- 25 4. A method as claimed in claim 1, wherein the monitoring is based on at least one location area determined based on said information of the area of interest.
- 30 5. A method as claimed in claim 1, wherein the monitoring is based on at least one routing area determined based on said information of the area of interest.

6. A method as claimed in claim 1, wherein the monitoring is based on at least one service area determined based on said information of the area of interest.

5 7. A method as claimed in claim 1, wherein the area of interest is defined by means of a shape of the area.

8. A method as claimed in any preceding claim, wherein the request contains further information regarding the event to  
10 reported, the further information defining whether entering or leaving of the area of interest shall be reported.

9. A method as claimed in any preceding claim, comprising  
15 cancelling the request for area event notifications.

10. An arrangement in a communication system, comprising:  
mobile stations adapted for wireless communication with  
base stations of the communication system;

a location service entity adapted for receiving an area  
20 event notification request containing information associated with the identity of a target mobile station and an area of interest;

monitoring means for monitoring, in response to receiving  
said request, for an event indicative of a change in the  
25 presence status of the target mobile station relative to said area of interest and for signalling a notification in response to detection of such event.

11. An arrangement as claimed in claim 10, wherein the  
30 monitoring means are provided in association with the target mobile station.

12. An arrangement as claimed in claim 10 or 11, wherein the monitoring is based on an area identifier associated with the operation of the communication system.

5 13. An arrangement as claimed in claim 10 or 11, wherein the area of interest is defined by means of the shape thereof.

14. An area event notification request for use in a communication system wherein mobile stations adapted for  
10 wireless communication with base stations of the communication system, the request being for activating monitoring for an event indicative of a change in the presence status of a target mobile station relative to an area of interest and containing information associated with the identity of the  
15 target mobile station and the area of interest.

### Abstract

A method of providing information regarding a mobile station adapted for communication via a communication system is provided. In the method an area event notification request is received at a location service entity provided in association with the communication system, the area event notification request containing information associated with the identity of the mobile station and an area of interest. Monitoring for an event indicative of a change in the presence status of the mobile station relative to said area of interest is then activated. A notification is signalled in response to detection of such event.

15 (Fig. 1)



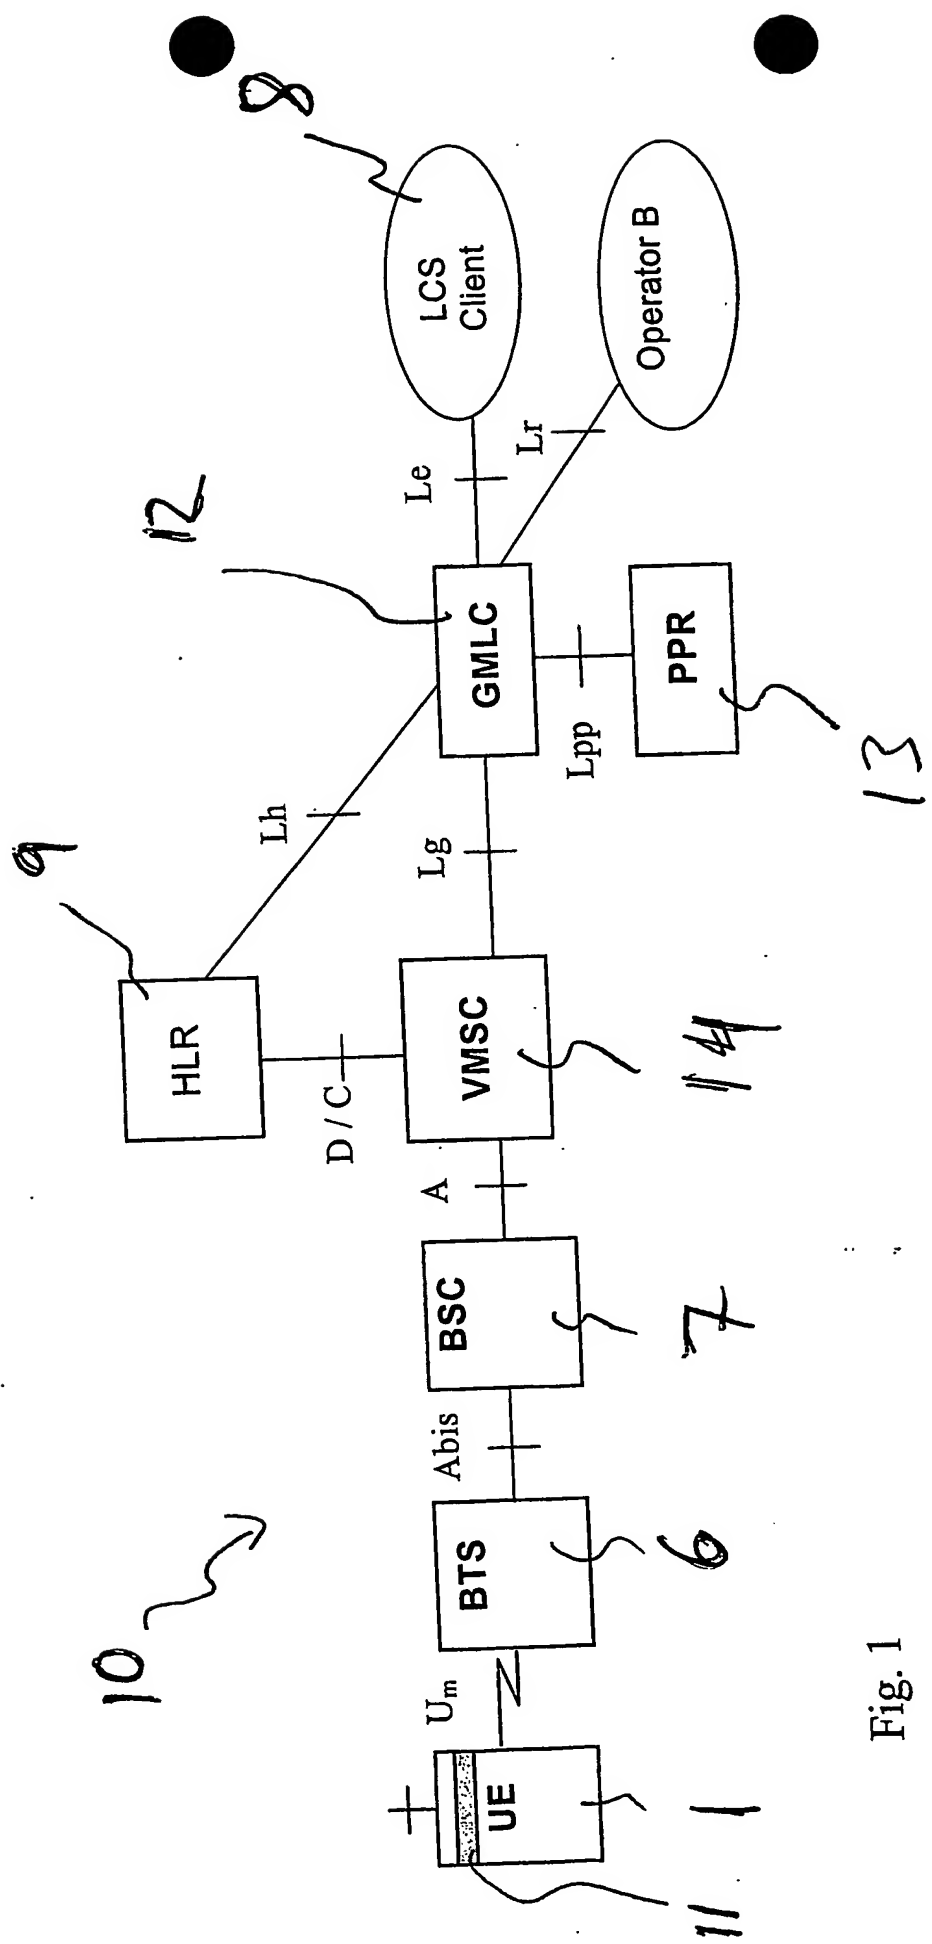


Fig. 1

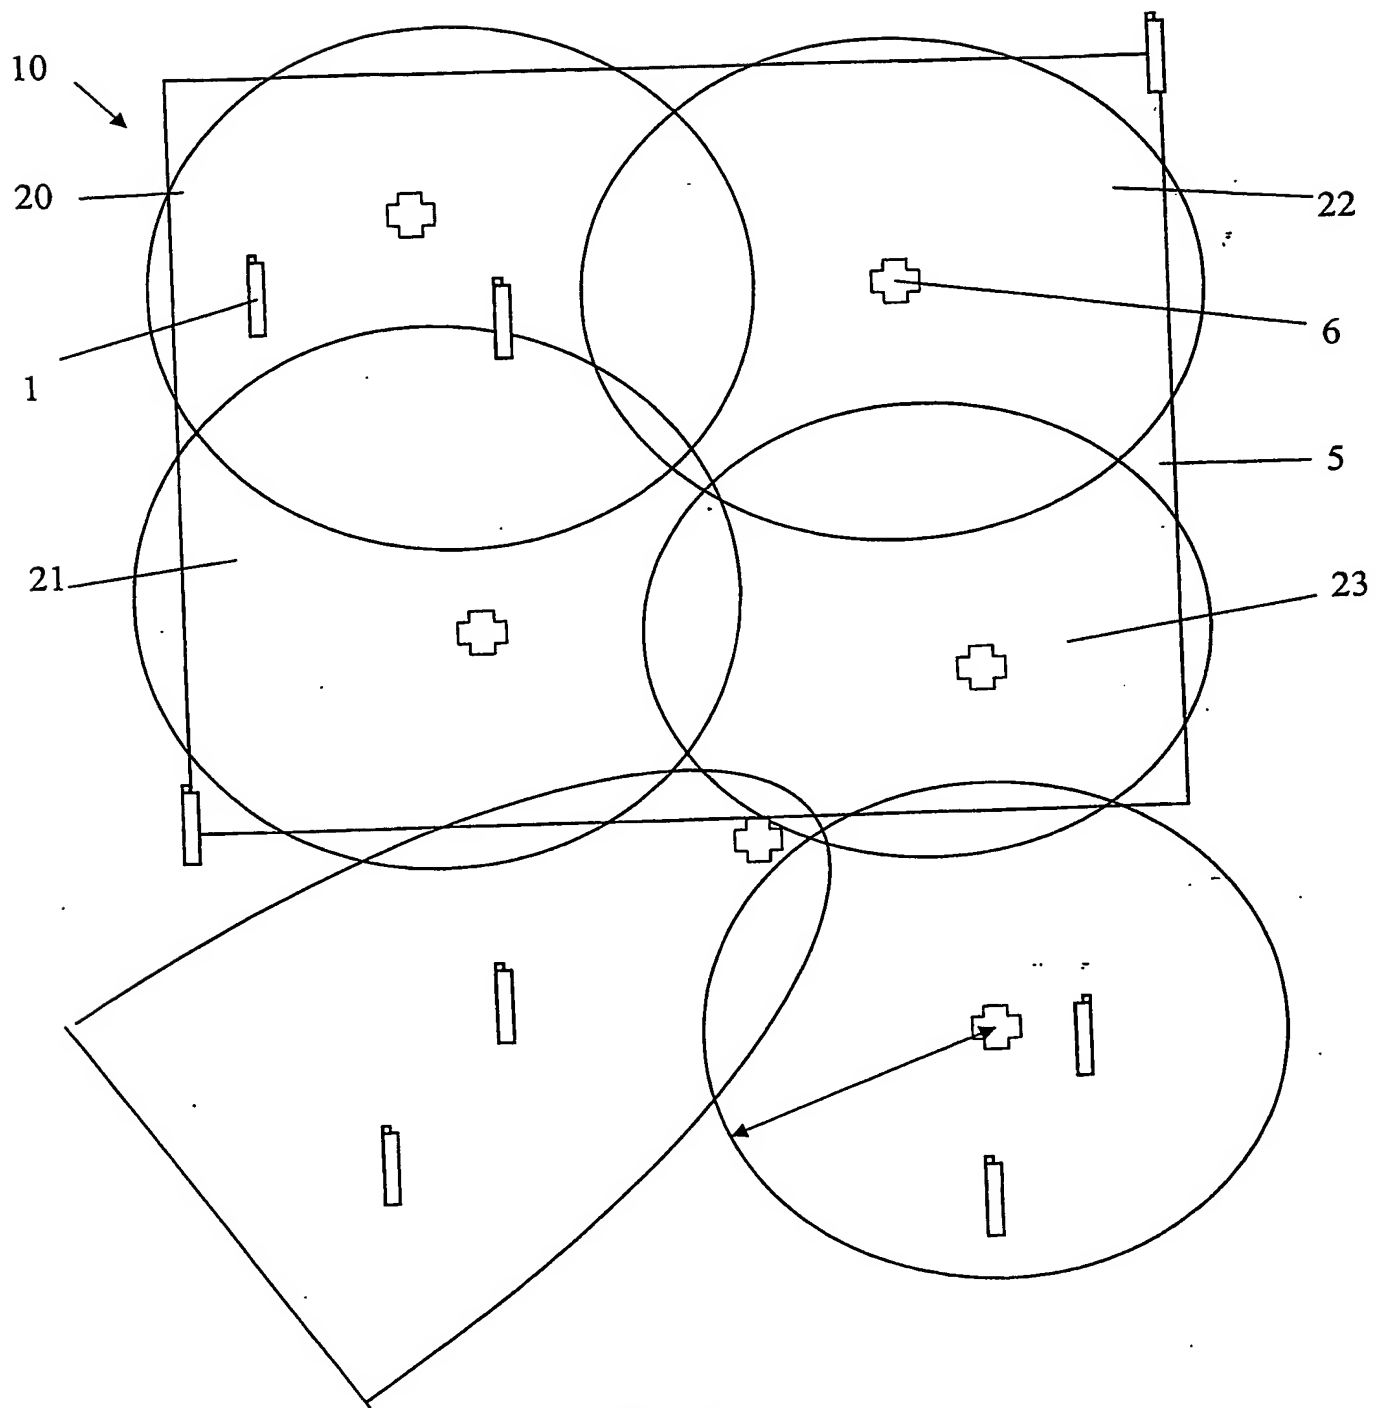


Fig. 2


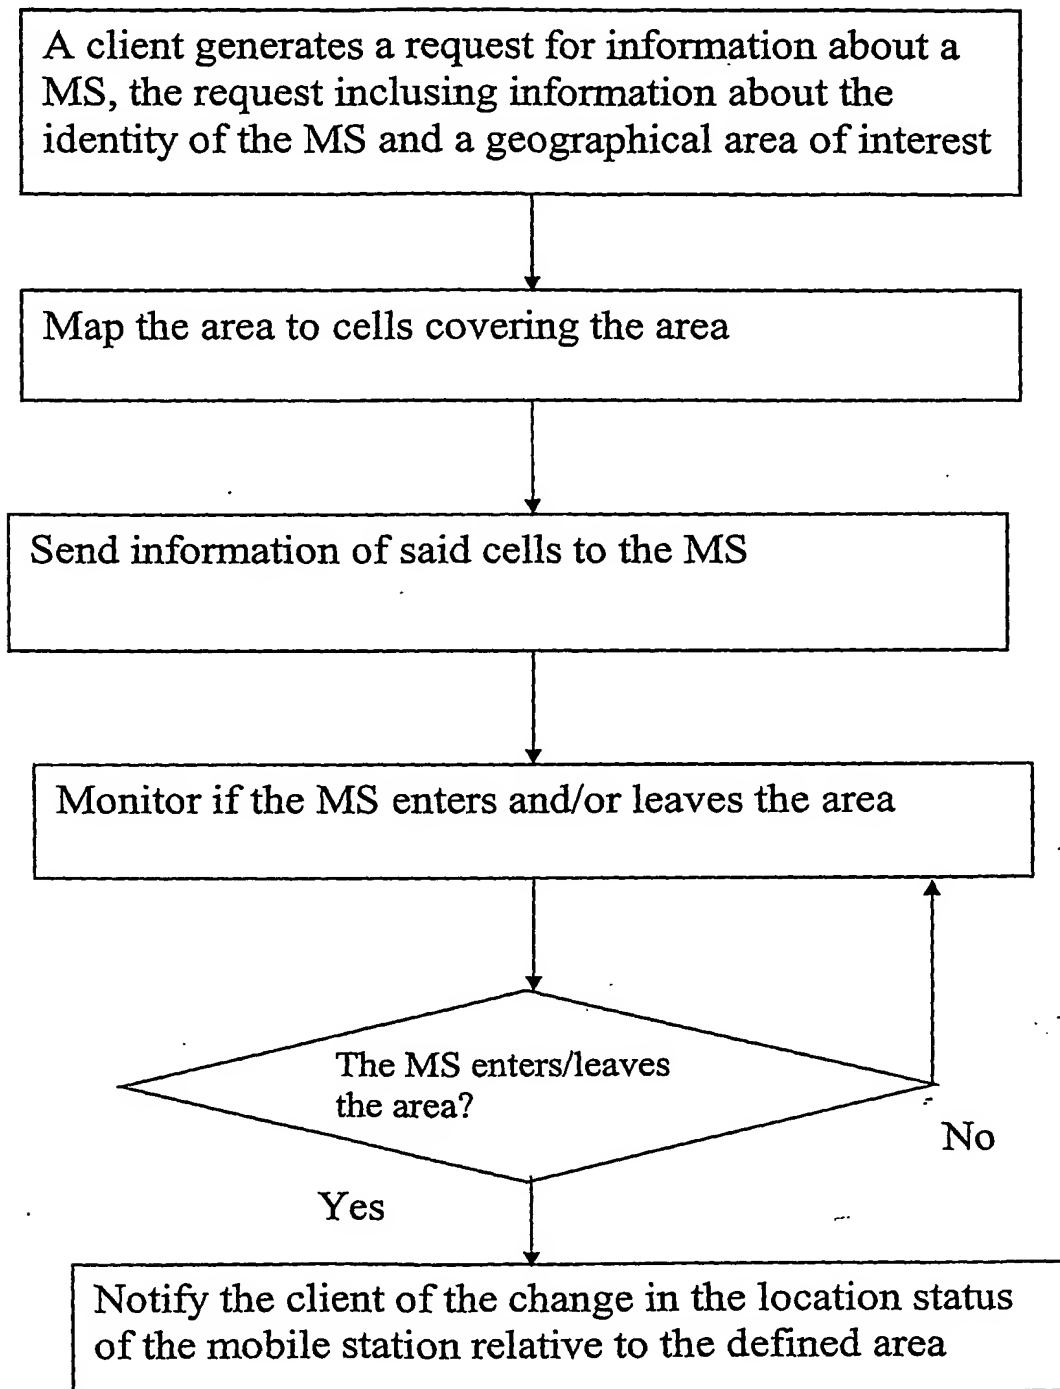


Fig. 3

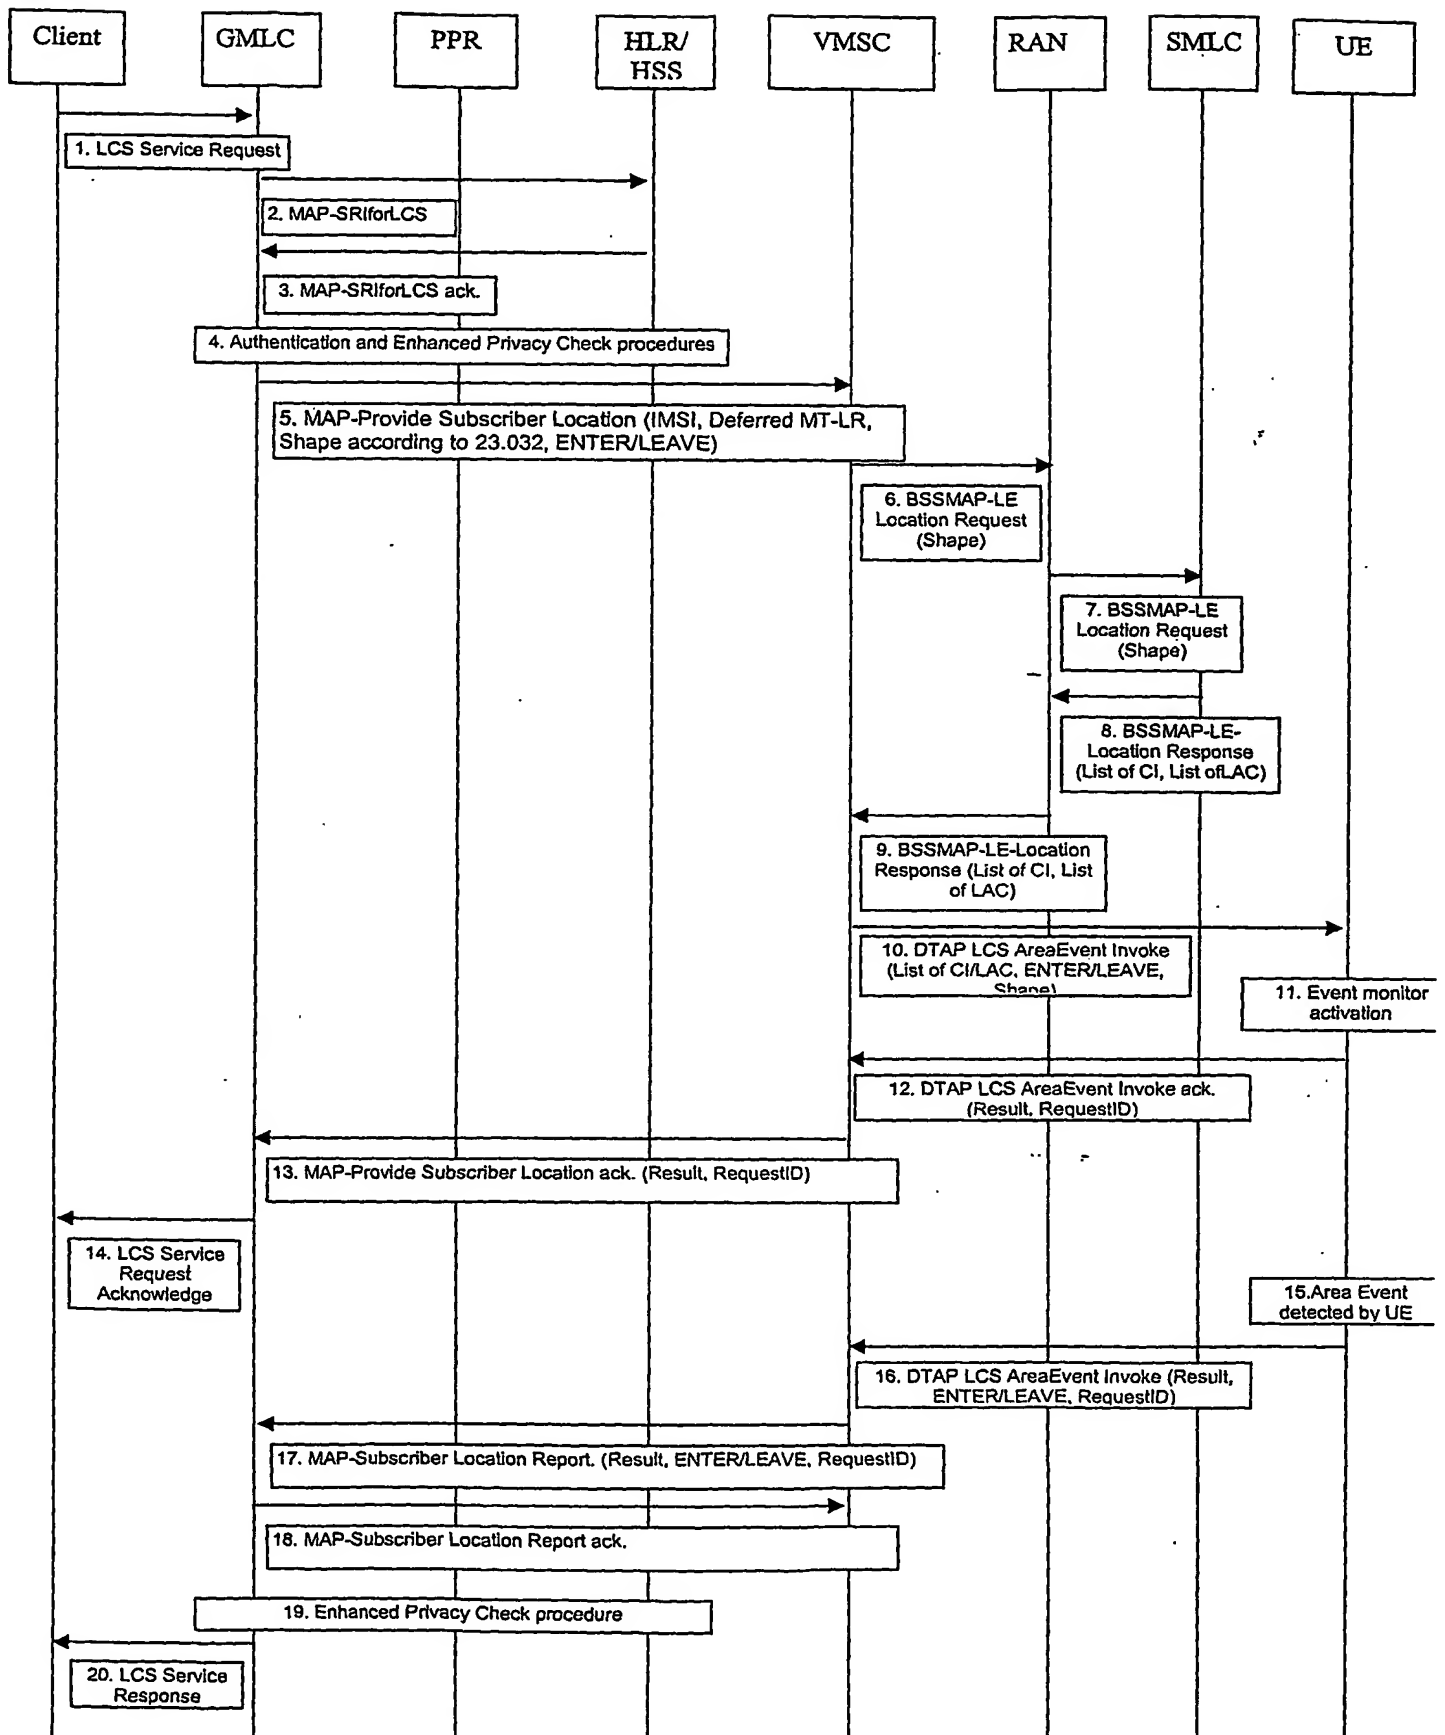

**Fig. 4**

ProvideSubscriberLocation-Arg ::= SEQUENCE {		
locationType	LocationType,	
mlc-Number	ISDN-AddressString,	
lcs-ClientID	[0] LCS-ClientID	OPTIONAL,
privacyOverride	[1] NULL	OPTIONAL,
imsi	[2] IMSI	OPTIONAL,
msisdn	[3] ISDN-AddressString	OPTIONAL,
lmsi	[4] LMSI	OPTIONAL,
imei	[5] IMEI	OPTIONAL,
lcs-Priority	[6] LCS-Priority	OPTIONAL,
lcs-QoS	[7] LCS-QoS	OPTIONAL,
extensionContainer	[8] ExtensionContainer	OPTIONAL,
...		
supportedGADShapes	[9] SupportedGADShapes	OPTIONAL,
lcsServiceTypeID	[10] LCSServiceTypeID	OPTIONAL,
lcsCodeword	[11] LCSCodeword	OPTIONAL,
lcsTriggerArea	[12] Ext-Geographical	
	Information	OPTIONAL,
requestID	[13] RequestID	OPTIONAL }
DeferredLocationEventType ::= BIT STRING {		
msAvailable	(0),	
areaEventEnter	(1),	
areaEventLeave	(2) }	(SIZE (1..16))

Fig. 5

Information element	Type/Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
Location Type	Location Type	M	TLV	3-4
Cell Identifier	Cell Identifier	O	TLV	3-10
Classmark Information Type 3	Classmark Information Type 3	O	TLV	2-n
LCS Client Type	LCS Client Type	C	TLV	3
Chosen Channel	Chosen Channel	O	TLV	2-n
LCS Priority	LCS Priority	O	TLV	3
LCS QoS	LCS QoS	O	TLV	6
Requested GPS Assistance Data	Requested GPS Assistance Data	O	TLV	3-n
BSSLAP APDU	APDU	O	TLV	2-n
LCS Capability	LCS Capability	O	TLV	3-n
Packet Measurement Report	Packet Measurement Report	O	TLV	2-n
Measured Cell Identity List	Cell Identity List	O	TLV	6-n
Shape	Shape	C	???	???

Fig. 6

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	Location Information							
Octet 4	Positioning Method							

Fig. 7

Information element	Type/Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
Location Estimate	Geographic Location	C	TLV	2-22
Positioning Data	Positioning Data	O	TLV	2-n
Deciphering Keys	Deciphering Keys	O	TLV	17
LCS Cause	LCS Cause	O	TLV	3
CGIList	List of CGIs	C	???	???
LACList	List of LACs	O	???	???

Fig. 8

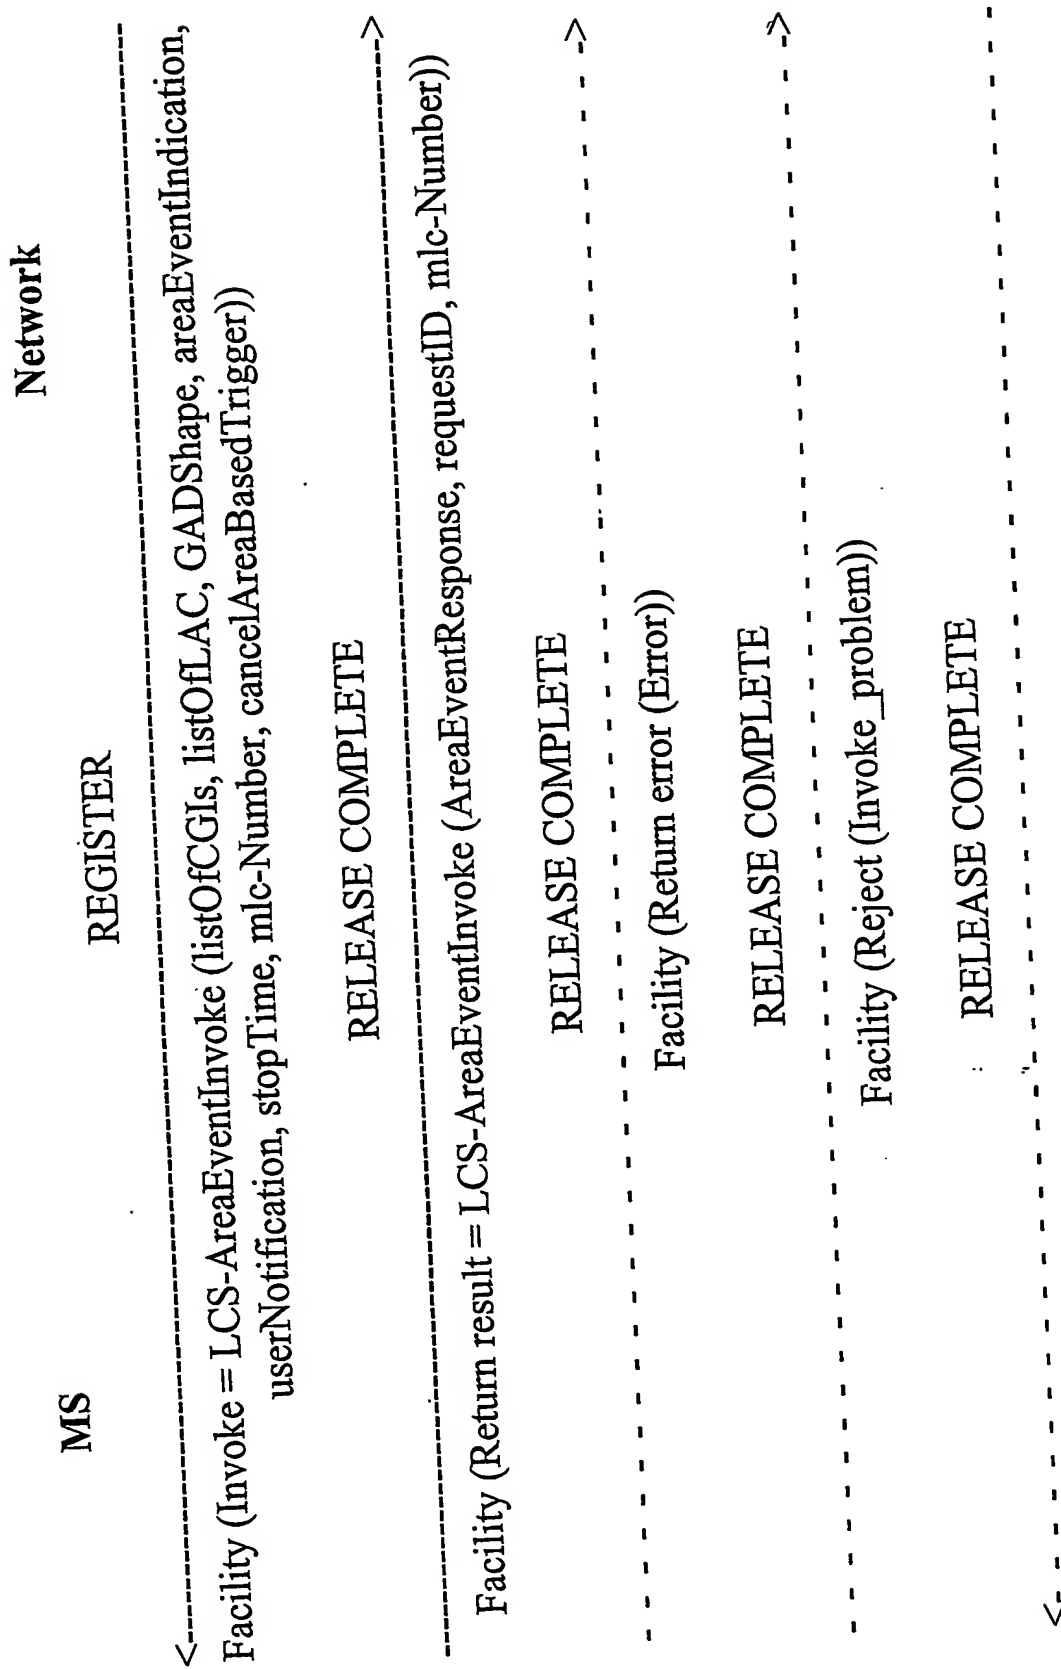


Fig. 9

<b>ProvideSubscriberLocation-Res ::= SEQUENCE {</b>		
locationEstimate	Ext-GeographicalInformation,	
ageOfLocationEstimate	[0] AgeOfLocationInformation	OPTIONAL,
extensionContainer	[1] ExtensionContainer	OPTIONAL,
...		,
add-LocationEstimate	[2] Add-GeographicalInformation	OPTIONAL,
deferredmt-lrResponseIndicator	[3] NULL	OPTIONAL,
requestID	[4] RequestID	OPTIONAL,
areaEventResult	[5] AreaEventResult	OPTIONAL }
<b>AreaEventResult ::= ENUMERATED {</b>		
registeredWaiting	(0),	
triggerSatisfied	(1),	
maxNumberReached	(2),	
rejectedME	(3),	
rejectedUser	(4),	
...	}	

Fig. 10



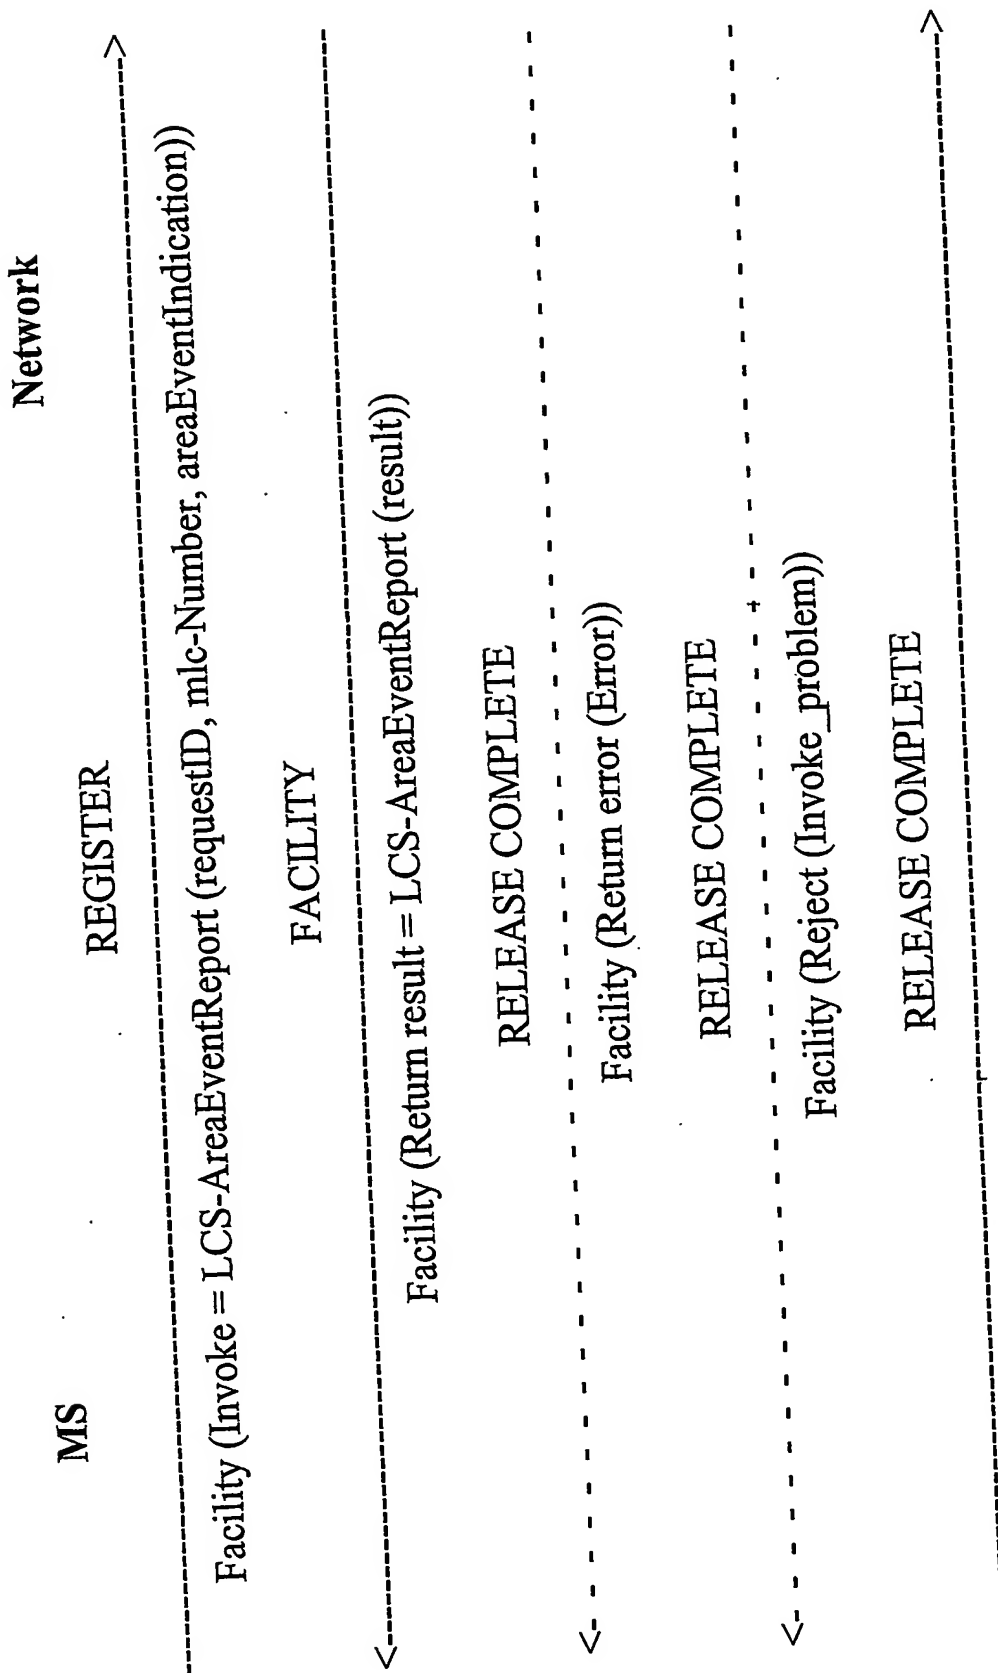


Fig. 11


**SubscriberLocationReport-Arg ::= SEQUENCE {**

lcs-Event	LCS-Event,	
lcs-ClientID	LCS-ClientID,	
lcsLocationInfo	LCSLocationInfo,	
msisdn	[0] ISDN-AddressString	OPTIONAL,
imsi	[1] IMSI	OPTIONAL,
imei	[2] IMEI	OPTIONAL,
na-ESRD	[3] ISDN-AddressString	OPTIONAL,
na-ESRK	[4] ISDN-AddressString	OPTIONAL,
locationEstimate	[5] Ext-GeographicalInformation	OPTIONAL,
ageOfLocationEstimate	[6] AgeOfLocationInformation	OPTIONAL,
extensionContainer	[7] ExtensionContainer	OPTIONAL,
...		
add-LocationEstimate	[8] Add-GeographicalInformation	OPTIONAL,
deferredmt-lrData	[9] Deferredmt-lrData	OPTIONAL,
requestID	[10] RequestID	OPTIONAL }

**LCS-Event ::= ENUMERATED {**

emergencyCallOrigination (0),  
emergencyCallRelease (1),  
mo-lr (2),  
...,  
deferredmt-lrResponse (3), areaEventEnter (4), areaEventLeave (5) }

Fig. 12

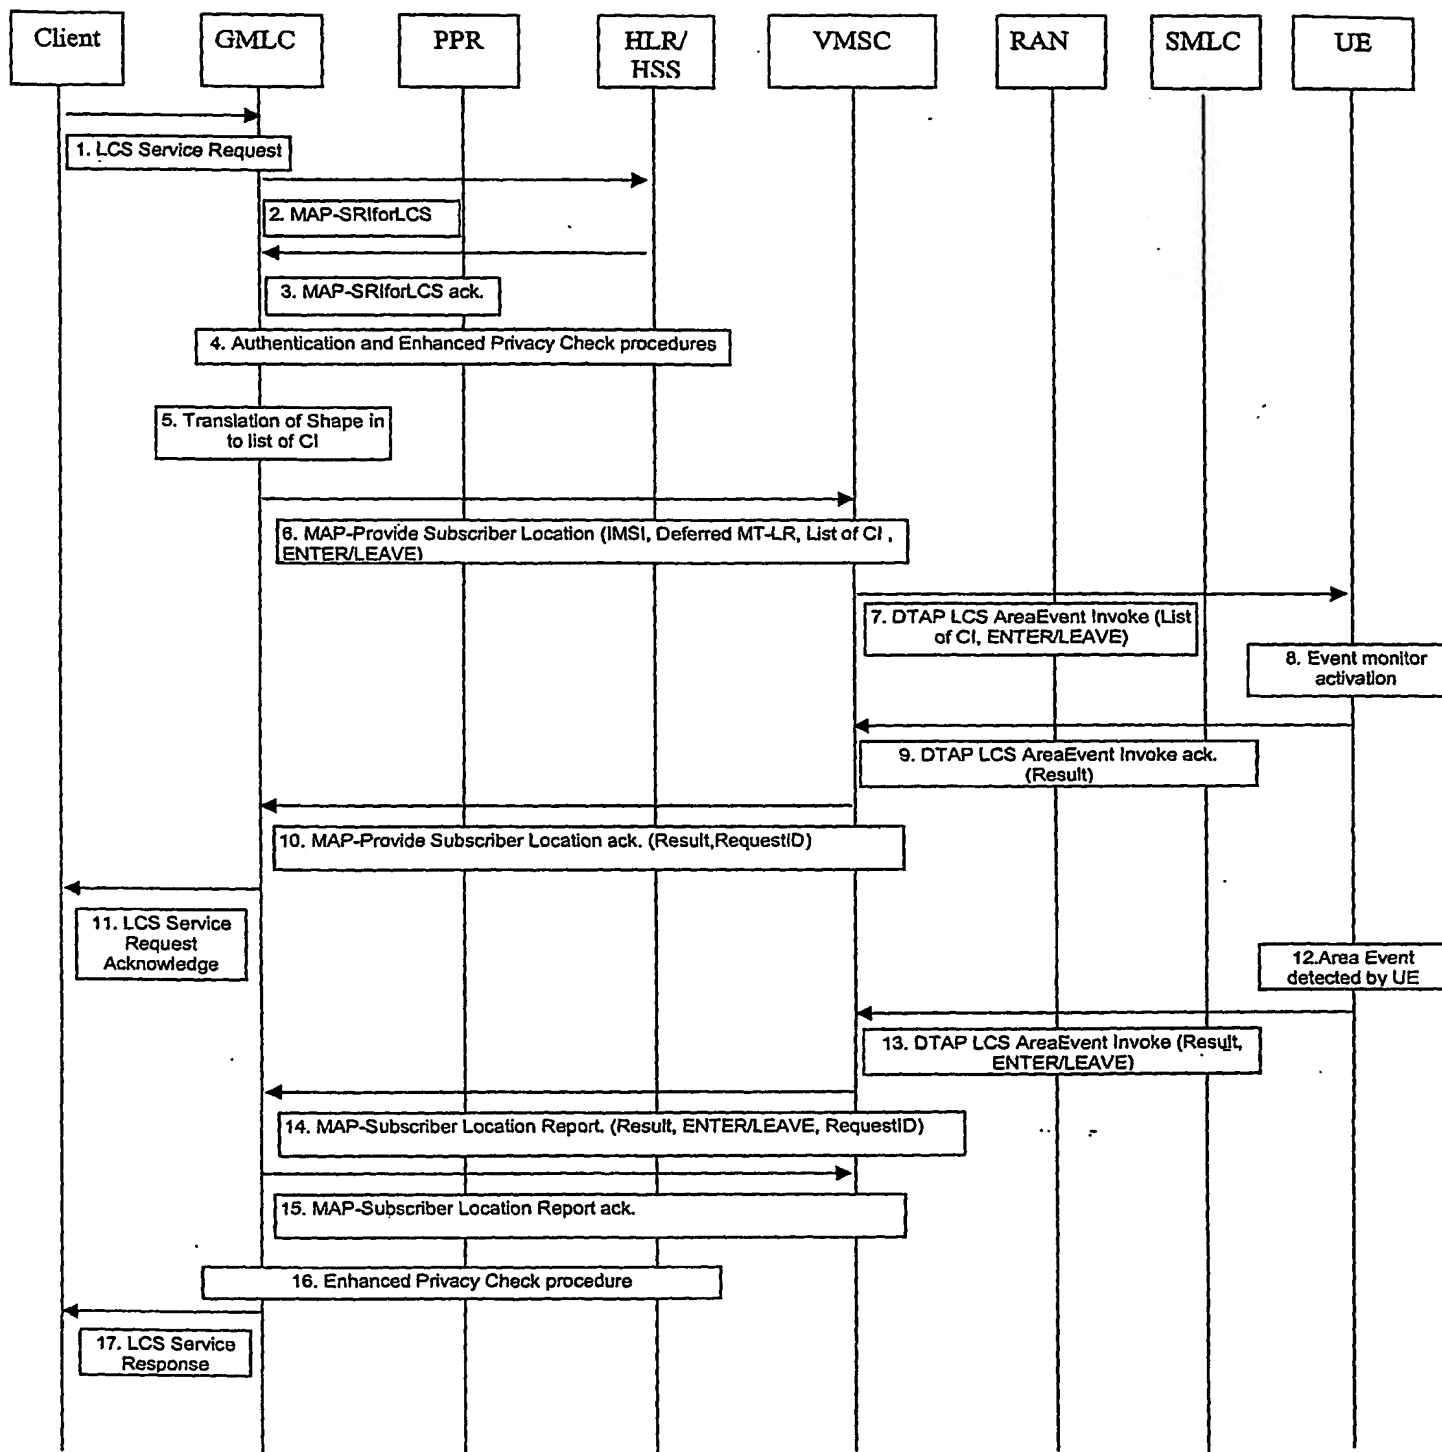

**Fig. 13**

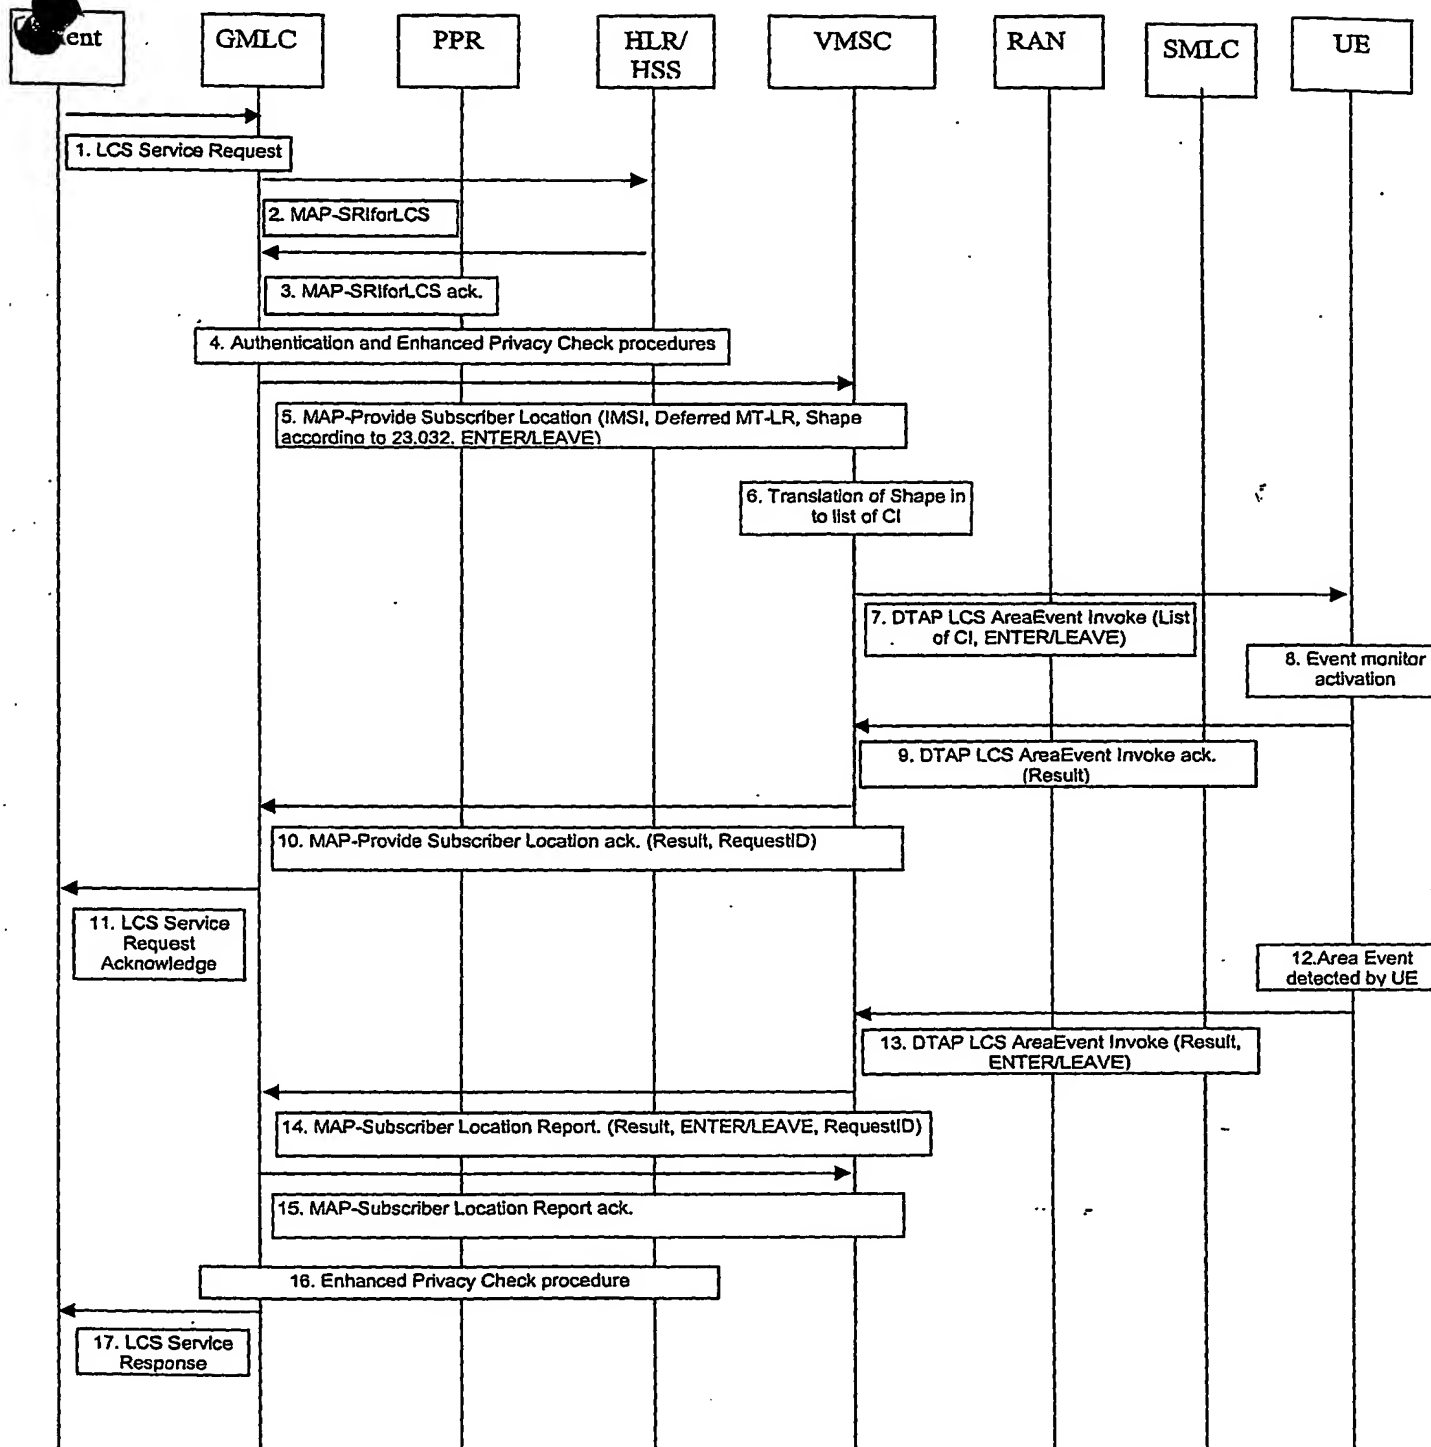


Fig. 14

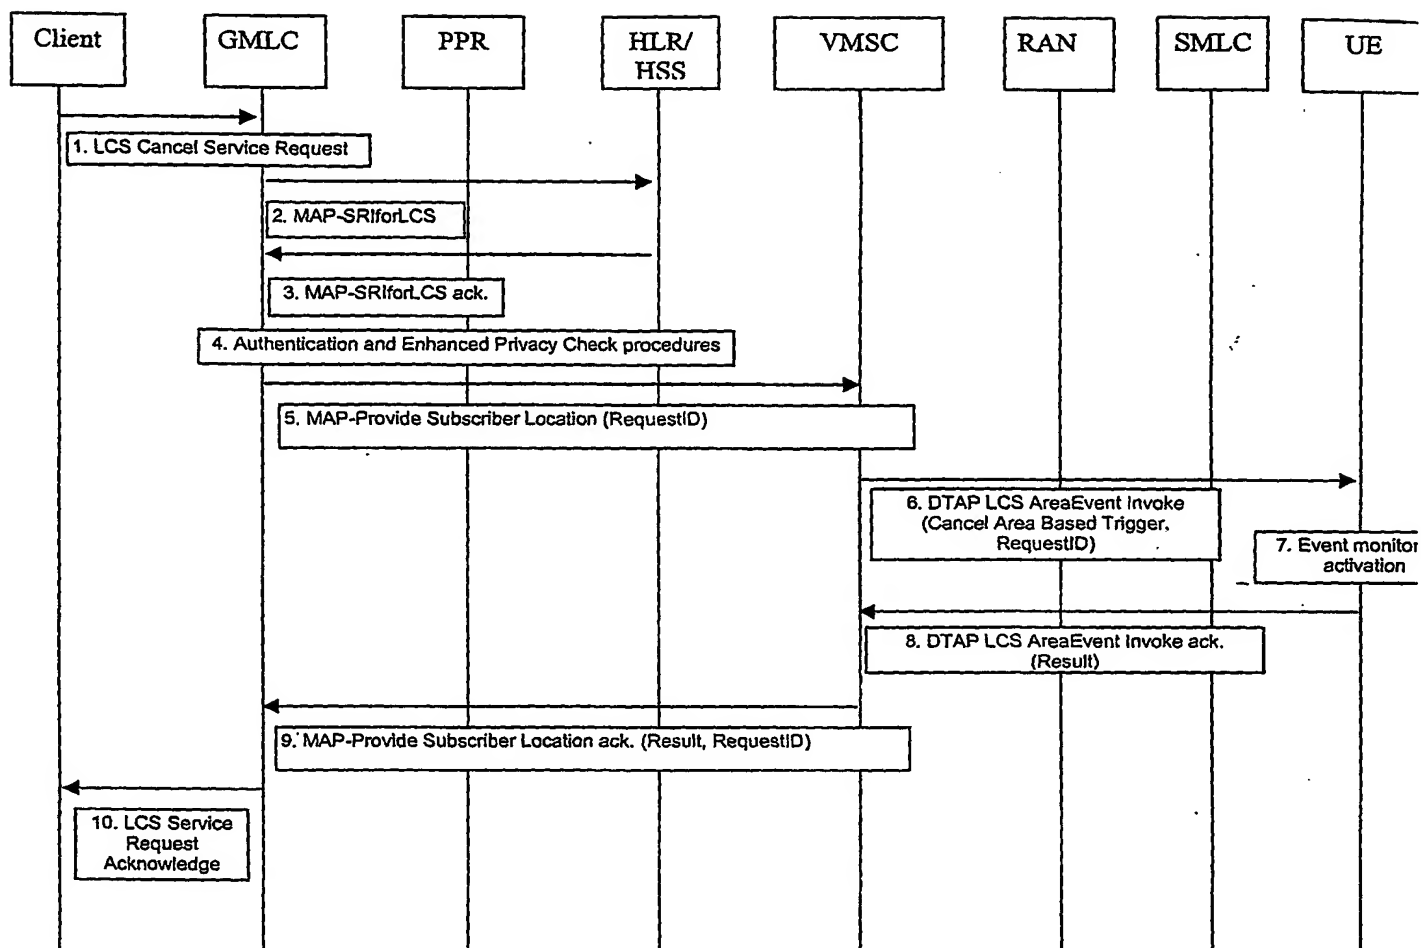


Fig. 15

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**